


# D3664-B mSTX

## Extended Lifecycle Series

---

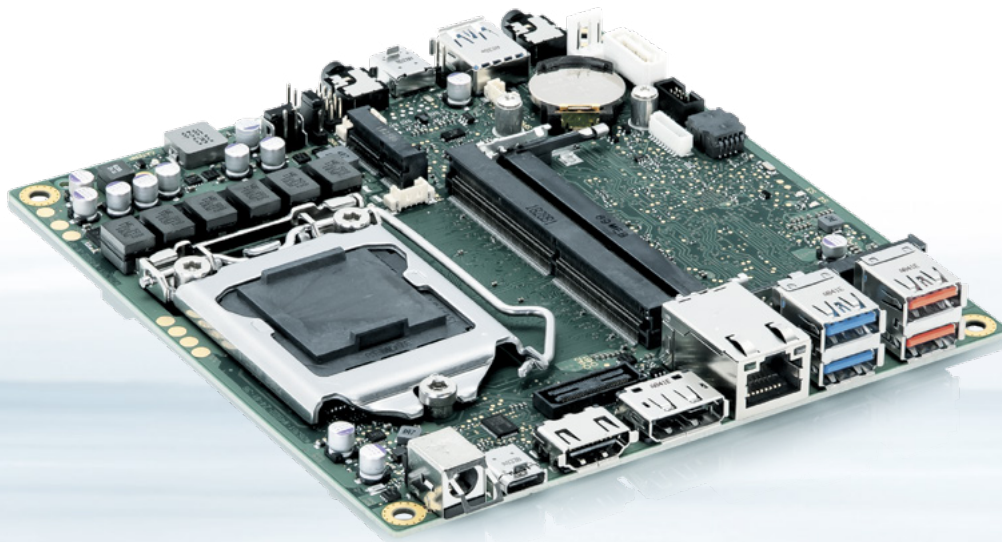

### Intel® Q370 Express Chipset and Intel® 8th/9th Gen Core™ i3/i5/i7/i9 Processors

- ▶ cTDP – Easy & flexible reduction of CPU TDP
- ▶ Ultra-small Platform supporting Intel® AMT 12.0
- ▶ HDMI V1.4 and DP V1.2
- ▶ M.2 SSD & M.2 WLAN Slots onboard
- ▶ Powerful USB 3.1 Gen2

POSSIBILITIES START HERE



# D3664-B mSTX


## Extended Lifecycle Series

The Motherboard D3664-B comes in Mini-STX format und features the powerful Intel® Q370 express chipset as well as DDR4-2666 SDRAM Memory and Intel® 8th/9th Gen Core™ i9/i7/i5/i3 processor series. The motherboard has been designed for 24/7 operation at temperatures of up to 50 °C and is ideal for complex applications with semi-industrial needs and compact applications like POS.

Besides a variety of connectivity options and interfaces like USB 3.1 Gen2, SATA III for SSDs and HDDs as well as HDMI and DisplayPort 1.2 the motherboard offers a wide range of special features like highly efficient power supply and three-stage hardware watchdog.

### ▶ PRODUCT HIGHLIGHTS

- ▶ Intel® 8th/9th Gen Core™ Processor Series
- ▶ DDR4-2666 SDRAM, max. 32 GByte
- ▶ cTDP – Easy & flexible reduction of CPU TDP
- ▶ Supporting Intel® AMT 12.0
- ▶ Intel® HD Graphics (DX12, integrated in processor)
- ▶ HDMI V1.4 and DP V1.2
- ▶ Stereo Audio onboard
- ▶ USB 2.0, USB3.1 Gen1/Gen2 onboard & USB Type-C (DP Alt Mode)
- ▶ Onboard support for M.2 SSD (PCIe x4 based M.2 2280)
- ▶ Onboard support for M.2 WLAN/Bluetooth (M.2 2230)
- ▶ Intel® GbE LAN onboard
- ▶ Intel integrated TPM V2.0 onboard
- ▶ DC Power Supply 19 V
- ▶ HW Watchdog onboard

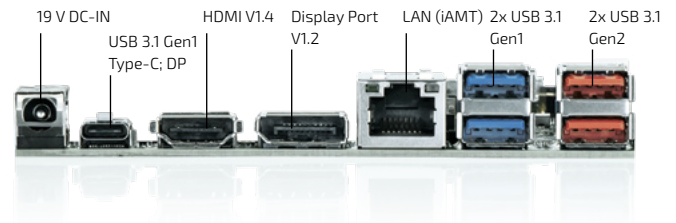

### ▶ TECHNICAL INFORMATION

<b>SYSTEM</b>	<b>PROCESSOR</b>	Intel® Core™ i9/i7/i5/i3 (8th/9th Gen) processor series Intel® Pentium®/Intel® Celeron® processor series Socket LGA1151 – up to 65 W TDP
	<b>CHIPSET</b>	Intel® Q370 Chipset
	<b>MEMORY</b>	DDR4-2666, Dual Channel 2 SO-DIMM sockets, up to 32 GByte memory
<b>VIDEO</b>	<b>GRAPHICS</b>	Intel® HD Graphics (depends on installed processor), DX12
<b>AUDIO</b>	<b>AUDIO CODEC</b>	Realtek ALC671
	<b>AUDIO INTERFACE</b>	stereo, High Definition Audio Codec
<b>NETWORK CONNECTION</b>	<b>ETHERNET</b>	Intel® i219LM with 10/100/1000 MBit/s, iAMT12 Wake-on-LAN (WoL) by interesting Packets, Link Status Change and Magic Packet™, PXE support, BIOS MAC Address Display
<b>PERIPHERAL CONNECTION</b>	<b>USB</b>	3x USB 3.1 Gen1, 2x USB 3.1 Gen1 Type C, 2x USB 3.1 Gen2, 2x USB 2.0 (by header)
<b>STORAGE &amp; EXPANSION</b>	<b>SATA</b>	1x Serial ATA III 600 Interface (up to 6GBit/s), NCQ, AHCI, 1x M.2 PCIe (2280), 1x M.2 Key-E (2230)
<b>POWER</b>	<b>CONNECTOR</b>	External DC-in
	<b>INPUT VOLTAGE</b>	19 V
<b>FIRMWARE</b>	<b>BIOS</b>	AMI Aptio 5.x (UEFI) BIOS modified and adapted by Fujitsu Technology Solutions; Recovery BIOS, SM-BIOS (DMI), BIOS and CPU Microcode Update, Quick Boot, Logo Boot, Quiet Boot, Plug & Play, Automatic DRAM Configuration, BIOS Support for S.M.A.R.T., Advanced Power Management, ACPI S3/S4, Wake on time from S5, Boot support for M.2 SSD (PCIe x4-based M.2, NVME) BIOS integrated HW Diagnostic Tool, Watchdog Support No legacy OS support, no MBR installation
	<b>WATCHDOG</b>	3 level Watchdog (BIOS/BIOS Post/OS HW) integrated
	<b>REAL TIME CLOCK</b>	Intel® integrated TPM V2.0
	<b>TPM</b>	

## ▶ TECHNICAL INFORMATION

<b>SYSTEM CONTROL</b>	<b>FP HEADER</b> <b>SECURITY</b>	1x Header for Reset button, HDD LED & External Speaker, Power button, Power LED Recovery BIOS, System and BIOS Password, Boot Sequence Control, USB- Port Access Protection, Boot Sector Virus Warning, Write Protection for Flash BIOS, EraseDisk (BIOS Feature), Intel integrated TPM V2.0
<b>COOLING</b>	<b>FAN</b>	2x PWM fan (CPU/System); 5 V
<b>SOFTWARE</b>	<b>OS SUPPORT</b>	MS Windows 10 Linux-64
<b>MECHANICAL</b>	<b>DIMENSIONS (L x W)</b>	Mini-STX: 5.5" x 5.8" (140 x 148 mm)
<b>CERTIFICATION</b>	<b>EMC &amp; SAFETY</b>	FCC-B verified cTUVus acc. IEC62368-1 (upon request); CE Class B

## ▶ POWER SUPPLY REQUIREMENTS

SOURCE*	VOLTAGE	MIN. PS LOAD	MAX. VOLTAGE TOLERANCE	MAX. MOTHERBOARD INPUT POWER
External DC-In connector	19 V	0 A	+10% / -15%	max. 5 A max. 95 W*

\*) See TechNotes document for details

## ▶ TECHNICAL INFORMATION

<b>FEATURES</b>	Chipset Board Size DP V1.2 / 2nd DP V1.2 / LVDS / HDMI 1.4 / eDP / USB-C (DP V1.2) Buzzer / int. Speaker Support (mono) / Stereo Audio LAN Gbit / 100 Mbit / 10 Mbit / WoL / LAN Boot iAMT 12.0 / vPro / Intel Standard Manageability / DASH V1.1 SATA / RAID / eSATA-Support / mSATA / M.2 SSD (PCIe) USB 2.0 / USB 3.1 gen1 / USB 3.1 gen2 FAN monitored & controlled PSU / CPU / AUX1 / AUX2 TEMP monitored CPU / onboard sensors / external sensor	iQ370 Mini-STX + / - / - / + / - / + - / + / + + / + / + / + / + + / +* / - / - + / - / + / - / + + / + / + - / + / + / - + / + / -
<b>SPECIAL FEATURES</b>	Silent Fan / System Guard / cTDP Recovery BIOS / Desk Update / Multi Boot HDD Password / EraseDisk / TPM V2.0 Logo Boot Option High Efficiency Core Voltage Regulator Design BIOS POST- / BIOS Boot- / OS- HW Watchdog Operating Mode 24-7 / 8-5 (hrs per day - days per week) Motherboard operating temperature range (chassis inside)**	+ / + / + + / + / + + / + / + + + + / + / + + / - 10 °C – 50 °C
<b>INTERNAL CONNECTORS</b>	SO DIMM Sockets (DDR4-2666) SATA-600 / mSATA / M.2 SSD 2280 (Key-M, PCIe/NVME) M.2 2230 (Key-E, PCIe & USB2.0 for WLAN/Bluetooth) Front Panel Audio (9-Pin, HD Audio) USB 2.0 channels / USB 3.1 Gen1 / USB 3.1 Gen2 / USB Stick Serial (COM1, RS232) / Parallel Port Connector LVDS / LVDS Backlight / Embedded DisplayPort FAN PSU / CPU (PWM) / AUX1 (PWM) / AUX2*** Intrusion (Case Open) / GPIO (8Bit) / SMBus (Case Temp.) Internal Mono Speaker header / DMIC header (digital microphone) Front Panel (Power, LEDs, Intel 10 pin header, 2mm pitch)**** Onboard 3-pin SATA Drive Power Connector (5 V) Onboard (internal) DC-In Connector	2 1 / - / 1 1 - 2 / - / - / - - / - - / - / - 0 / 1 / 1 / 0 - / - / - 1 / - 1 1 1 -
<b>EXTERNAL CONNECTORS</b>	DVI-I / DVI-D / DisplayPort V1.2 / HDMI V1.4***** Audio Stereo Mic. In / Headphones (Headset) [Front Connectors] LAN (RJ-45) PS/2 Mouse / Keyboard USB 2.0 / USB 3.1 Gen1 / USB 3.1 Gen2 / USB 3.1 Gen1-Type C (DP)***** USB 3.1 Gen1 / USB 3.1 Gen1-Type C [Front Connectors] DC-In connector (external input) 19 V @ 5 A max.	- / - / 1 / 1 1 / 1 1 - / - 0 / 2 / 2 / 1 1 / 1 1

\*) TXT (Trusted Execution Technology) not supported!

\*\*) Forced cooling required, see technical documentation for details


\*\*\*) PWM Fans; specific fan connector required; 5V operating voltage!

\*\*\*\*) RESET feature not supported!

\*\*\*\*\*) Mainboard is prepared to support HDMI-CEC via 3rd party CEC module (appropriate cabling required)

\*\*\*\*\*) Supports DisplayPort - Alternate Mode

## CONNECTOR / SOCKET DIAGRAM

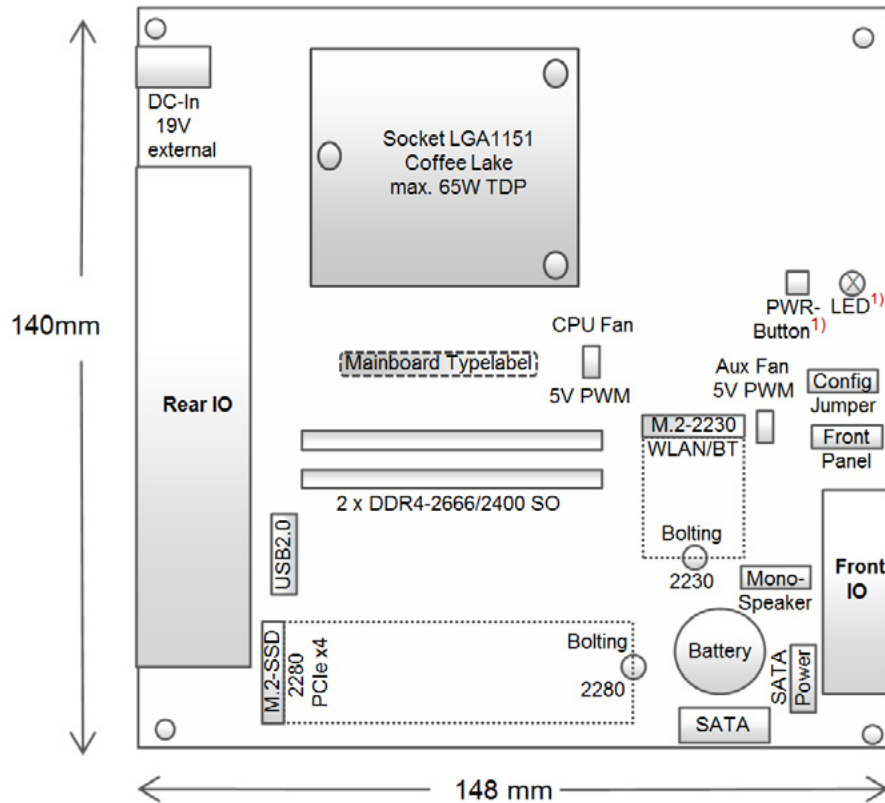

## ORDERING INFORMATION

ARTICLE	PART NO.	DESCRIPTION
D3664-B mSTX	F5120-V175	Intel® 8th/9th Gen Core™ Processor Series, Intel® Q370 Chipset
<b>ACCESSORIES</b>		
CHASSIS KIT INCL. COOLING SOLUTION	F5000-B2	SMARTCASE™ S520 Requires different rear chassis wall! (K1056-B520) (= included in D3664-B delivery kit)
AC ADAPTER 19 V / 65 W	F5000-P3	(E623)
VESA MOUNT KIT	F5000-X2	Suitable for SMARTCASE™ S500, S520
MONO SPEAKER KIT	F5000-K9	For chassis kit
WALL MOUNT BRACKETS	F5000-X1	Suitable for SMARTCASE™ S500, S520
DC-IN CONNECTOR LOCK	F5000-X3	Suitable for SMARTCASE™ S500, S520
DUAL WLAN ANTENNA KIT	F5000-W2	Incl. M.2 WLAN Module
SATA DATA/POWER CABLE	F5000-K12	For optional 2.5" drive

## Global Headquarters

### Kontron S&T AG

Lise-Meitner-Str. 3-5  
86156 Augsburg, Germany  
Tel.: + 49 821 4086 0  
Fax: + 49 821 4086 111  
info@kontron.com  
[www.kontron.com](http://www.kontron.com)