



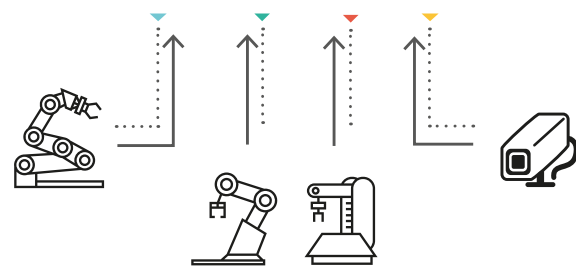

Low-power embedded architecture platform for Computer-on-Modules based on ARM and X86 technology. Perfect fit for mobile, embedded, connected solutions with scalable building blocks. Optimized pin-out definition for versatile architectures. Constructed to withstand harsh industrial environments.

▶ **SMARC 2.0**
Computer-On-Module Solutions

The SMARC™ (Smart Mobility Architecture) standard has in a matter of a few years become a major driving force behind the enablement of innovative ultra-low-power embedded computing technology solutions. Market demand and the disruptive influence of the Internet of Things (IoT) have already hastened the arrival of a new specification, SMARC 2.0.

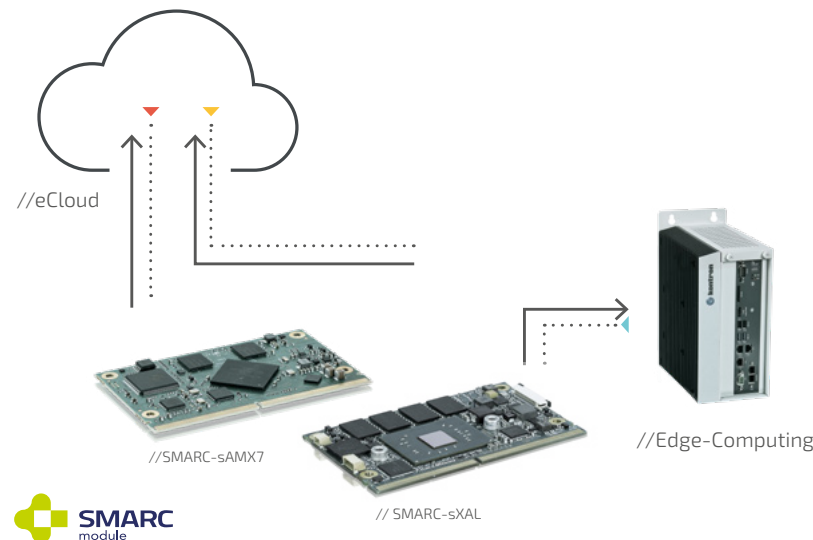

//Industrial 4.0

About Kontron – Member of the S&T Group

Kontron is a global leader in IoT/Embedded Computing Technology (ECT). As a part of technology group S&T, Kontron offers a combined portfolio of secure hardware, middleware and services for Internet of Things (IoT) and Industry 4.0 applications. With its standard products and tailor-made solutions based on highly reliable state-of-the-art embedded technologies, Kontron provides secure and innovative applications for a variety of industries. As a result, customers benefit from accelerated time-to-market, reduced total cost of ownership, product longevity and the best fully integrated applications overall.

For more information, please visit: www.kontron.com

About the Intel® Internet of Things Solutions Alliance


From modular components to market-ready systems, Intel and the 400+ global member companies of the Intel® Internet of Things Solutions Alliance provide scalable, interoperable solutions that accelerate deployment of intelligent devices and end-to-end analytics. Close collaboration with Intel and each other enables Alliance members to innovate with the latest IoT technologies, helping developers deliver first-in-market solutions.

Intel and Atom are registered trademarks of Intel Corporation in the U.S. and other countries.



Global Headquarters

Kontron S&T AG
Lise-Meitner-Str. 3-5
86156 Augsburg, Germany
Tel.: + 49 821 4086 0
Fax: + 49 821 4086 111
info@kontron.com
www.kontron.com

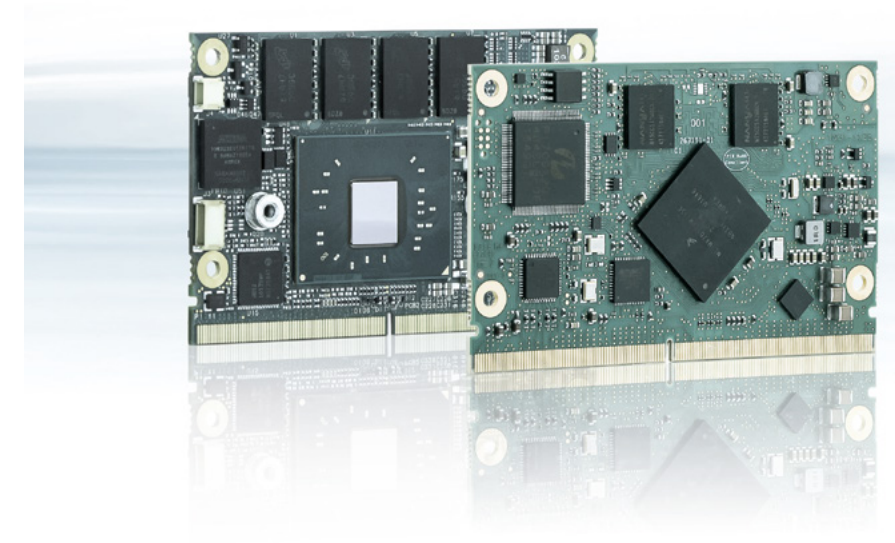

- ▶ **MODULE STANDARD FOR X86 AND ARM**
Optimized pin-out definition for versatile architectures
- ▶ **CREATING MOBILE, EMBEDDED, CONNECTED SOLUTIONS**
Ultra low-power, low profile
- ▶ **PERFECT FIT FOR IIOT APPLICATIONS**
High connectivity with USB, PCIe, up to 2 x LAN and 2x CAN

Copyright © 2020 Kontron AG. All rights reserved. All data is for information purposes only and not guaranteed for legal purposes. Information has been carefully checked and is believed to be accurate. However, Kontron AG does not assume any liability for errors or omissions. All other trademarks or registered trademarks are the property of their respective owners and are recognized. Specifications are subject to change without notice. SMARCTecSpec-20200218-WMH

BOARDS & MODULES – SMARC™



SMARC-sXBTi



SMARC-sXAL(4) (E2)
SMARC-sXAL (E2)



SMARC-sAMX6i



SMARC-sAMX7



SMARC-sAMX8X



SMARC-sAL28




COMPLIANCE	SMARC 1.1	SMARC 2.0
DIMENSIONS (H x W x D)	82 mm x 50 mm	82 x 50 mm
CPU	Intel Atom® E3845, 4C, 1.91 GHz, 10 W TDP Intel Atom® E3827, 2C, 1.75 GHz, 8 W TDP Intel Atom® E3826, 2C, 1.46 GHz, 7 W TDP Intel Atom® E3825, 2C, 1.33 GHz, 6 W TDP Intel Atom® E3815, 1C, 1.46 GHz, 5 W TDP	Intel Atom® x7-E3950, 4C, 1.6 / 2.0 GHz, 12 W TDP Intel Atom® x5-E3940, 4C, 1.6 / 1.8 GHz, 9.5 W TDP Intel Atom® x5-E3930, 2C, 1.3 / 1.8 GHz, 6.5 W TDP Intel® Pentium® N4200, 4C, 1.1 / 2.5 GHz, 6 W TDP Intel® Celeron® N3350, 2C, 1.1 / 2.4 GHz, 6 W TDP
MAIN MEMORY	Up to 8 GByte DDR3L-1333 memory down (ECC optional)	Up to 8GB ECC DDR3L (SMARC-sXAL) Up to 8GB LPDDR4 (SMARC-sXAL4)
GRAPHICS CONTROLLER	Intel® HD Graphics (Gen7)	Intel® HD Gfx Gen9
ETHERNET CONTROLLER	Intel® i210IT	Intel® I210IT / I211AT
ETHERNET	1x 1GB Ethernet	1x 1GB Ethernet (SMARC-sXAL) up to 2x 1 GB Ethernet (SMARC-sXAL4)
SATA	1x SATA 3Gb/s	1x SATA 3 Gb/s
FLASH ONBOARD	Up to 64 GByte eMMC	Up to 64 GByte e MMC
PCI EXPRESS® / PCI SUPPORT	3x PCIe Gen2 x1	3x PCIe x1
PANEL SIGNAL	LVDS Single Channel 18/24 bit or eDP HDMI or DP	1x HDMI (on request DP), 1x DP++, 1x LVDS dual channel (on request eDP)
USB	3x USB 2. 1x USB 3.0 (via AFB)	2x USB 3.0 (incl. USB 2.0) + 4x USB 2.0, alternatively USB #0 as OTG
SERIAL	1x RX/TX (Ser0) 2x UART (Ser1/3)	4x serial interfaces (2x RX / TX only)
ADDITIONAL INTERFACES	HD Audio and I2S, 5x I2C, 2x SPI, Camera Interface (MIPI CSI)	12x GPIO, SDIO, 5x I ² C, MIPI-CSI
OPERATING SYSTEM	Windows® 8, Windows® 7, WEBS, WES7, WEC7, Linux, VxWorks	Windows® 10, Enterprise, Windows 10 IoT, Linux, VxWorks
POWER SUPPLY	3 V - 5.25 V Operates directly from single level Lithium Ion from single level Lithium Ion cells or fixed 3.3 V or 5 V power supplies	3V - 5.25 V operates directly from single level Lithium Ion cells or fixed 3.3 V - 5 V power supplies (SMARC-sXAL) 5V only (SMARC-sXAL4)
TEMPERATURE	Operation: -40 °C to 85 °C	SMARC-sXAL(4): Commercial temperature: 0 °C to +60 °C operating, -30 °C to +85 °C non-operating SMARC-sXAL(4) E2: Industrial temperature: -40 °C to +85 °C operating, -40 °C to +85 °C non-operating
SPECIAL FEATURES	Industrial temperature version, ECC, Windows® 8	Trusted Platform Module TPM 2.0 Security Solution (APPROTECT) on request, Ind. Temp. Grade versions

COMPLIANCE	SMARC 1.1	SMARC 2.0
DIMENSIONS (H x W x D)	82 mm x 50 mm	82 x 50 mm
CPU	NXP i.MX 6 Single, Dual and Quad Core ARM Cortex-A9 800 MHz, 1.0 GHz, 1.2 GHz	NXP single/dual i.MX7 processor
MAIN MEMORY	Up to 2 GByte DDR3 memory down	Up to 2 GByte DDR3
GRAPHICS CONTROLLER	Dual Display HD 1080p Decode/Encode, 2D/3D acceleration	integrated
ETHERNET CONTROLLER	Integrated	integrated
ETHERNET	1x 1GB Ethernet	up to 2x 1GB Ethernet
SATA	1x SATA (dual/quad core)-solo	-
FLASH ONBOARD	Up to 64 GByte eMMC	Up to 64 GByte eMMC
PCI EXPRESS® / PCI SUPPORT	3x PCIe Gen2 x1	1x PCIe with dual core processor up to 3x PCIe (on request)
PANEL SIGNAL	Parallel LCD 18/24 bit LVDS Single Channel 18/24bit HDMI	1x LVDS dual channel
USB	2x USB 2.0, USB OTG	up to 5x USB 2.0
SERIAL	2x RX/TX (Ser1/3) 2x UART (Ser0/2)	4x serial interfaces (2x RX / TX only)
ADDITIONAL INTERFACES	12x GPIO, SDIO, 5x I ² C, 2x I ² S, 2x SPI, SPDIF, WDT,	12x GPIO, SDIO, 5x I ² C, MIPI-CSI, 2x CAN
OPERATING SYSTEM	Linux, Android, WEC7	Yocto Linux
POWER SUPPLY	3 V - 5.25 V Operates directly from single level Lithium Ion from single level Lithium Ion cells or fixed 3.3 V or 5 V power supplies	3 V - 5.25 V operates directly from single level Lithium Ion cells or fixed 3.3 V - 5 V power supplies
TEMPERATURE	Operation: -40 °C to 85 °C	Operating: extended consumer -20 °C to + 85 °C Non-Operating: -30 °C to +85 °C
SPECIAL FEATURES	Ultra low-power, 2x CAN Interfaces	Security Solution (APPROTECT) on request

COMPLIANCE	SMARC 2.0	SMARC 2.0
DIMENSIONS (H x W x D)	82 x 50 mm	82 x 50 mm
CPU	NXP dual/quad i.MX8X processor	NXP Dual Cortex A72 LS1028A processor
MAIN MEMORY	Up to 3 GByte LPDDR4	up to 8 GByte DDR3L (ECC)
GRAPHICS CONTROLLER	integrated	integrated
ETHERNET CONTROLLER	1x integrated, 1x on request	integrated
ETHERNET	up to 2x 1GB Ethernet	up to 2x 1GB Ethernet (TSN capable)
SATA	-	-
FLASH ONBOARD	Up to 64 GByte eMMC	Up to 64 GByte eMMC
PCI EXPRESS® / PCI SUPPORT	Up to 3x PCIe	Up to 2x PCIe x1 or 2x PCIe x2 or 1x PCIe x4
PANEL SIGNAL	1x LVDS, 1x HDMI, 1x DP	LVDS dual channel, eDP or DP as BOM option on request
USB	1x USB 3.0, 6x USB 2.0	up to 6x USB 2.0, 1x USB 3.0
SERIAL	4x serial interfaces (2x RX / TX only)	3x serial interfaces (2x RX / TX only)
ADDITIONAL INTERFACES	12x GPIO, SDIO, 5x I ² C, MIPI-CSI 2x CAN	12x GPIO, SDIO, 3x I2C, 1x CAN
OPERATING SYSTEM	Yocto Linux	Yocto Linux
POWER SUPPLY	3 V - 5.25 V operates directly from single level Lithium Ion cells or fixed 3.3 V - 5 V power supplies	3 V - 5.25 V operates directly from single level Lithium Ion cells or fixed 3.3 V - 5 V power supplies
TEMPERATURE	Operating: -40 °C to 85 °C	Operating: -40 °C to + 85 °C Non-Operating: -40 °C to +85 °C
SPECIAL FEATURES	Security Solution (APPROTECT) on request	Alternate function on PCIe C/D: SXGMII or UXGMII to connect Ethernet bridge phy directly on the carrier (allows up to 5x TSN capable 1GB LAN ports), (Support of Kontron APPROTECT) on request

SMARC 2.0 Carrier plus SMARC Evaluation Carrier

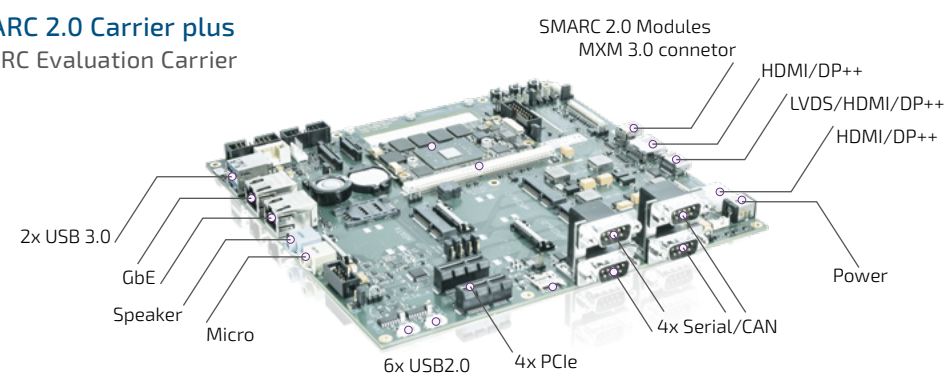

Learn more about Kontron SMARC embedded systems visit:
<https://www.kontron.com/products/boards-and-standard-form-factors/smarc/>